

RECTIFIER DIODE

ARF241

Repetitive voltage up to

2500 V

Mean forward current

262 A

Surge current

3, kA
FINAL SPECIFICATION

July 17 - Issue: 3


Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		150	2500	V
V _{RSM}	Non-repetitive peak reverse voltage		150	2600	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	150	50	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin, 50 Hz, Th=55°C, double side cooled		262	A
I _{F(AV)}	Mean forward current	180°square, 50 Hz, Th=55°C, double side cooled		263	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	150	3	kA
I ² t	I ² t			45 x 10 ³	A ² s
V _{FM}	Forward voltage	Forward current = 300 A	25	2,71	V
V _{F(TO)}	Threshold voltage		150	1,75	V
r _F	Forward slope resistance		150	3,2	mohm
SWITCHING					
t _{rr}	Reverse recovery time	IF= 200A	150	1,4	μs
Q _{rr}	Reverse recovery charge	di/dt= 40 A/μs		50	μC
I _{rr}	Peak reverse recovery current	VR= 50V		75	A
s	Softness (s-factor), min			0,4	
V _{FR}	Peak forward recovery	di/dt = 400 A/μs		30	V
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		95,0	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		20,0	°C/kW
T _j	Operating junction temperature			-30 / 150	°C
F	Mounting force			4.5 / 5.0	kN
	Mass			55	g

ORDERING INFORMATION : ARF241 S 25


 standard specification VRRM/100

DISSIPATION CHARACTERISTICS



SQUARE WAVE (50Hz)

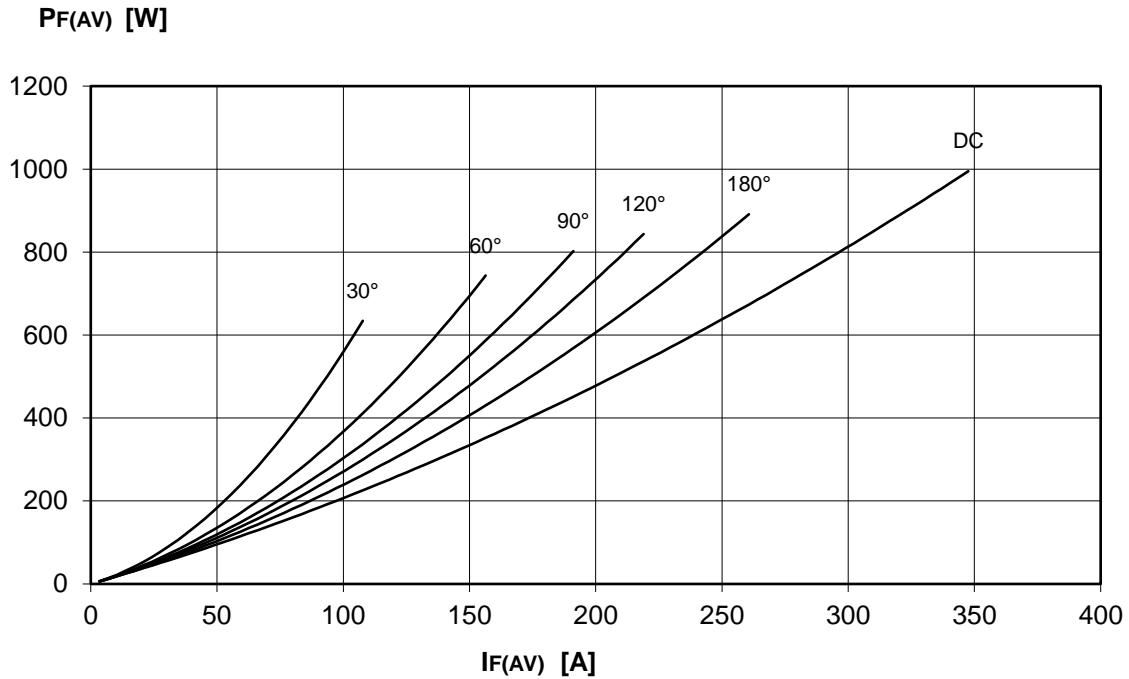


SINE WAVE (50Hz)

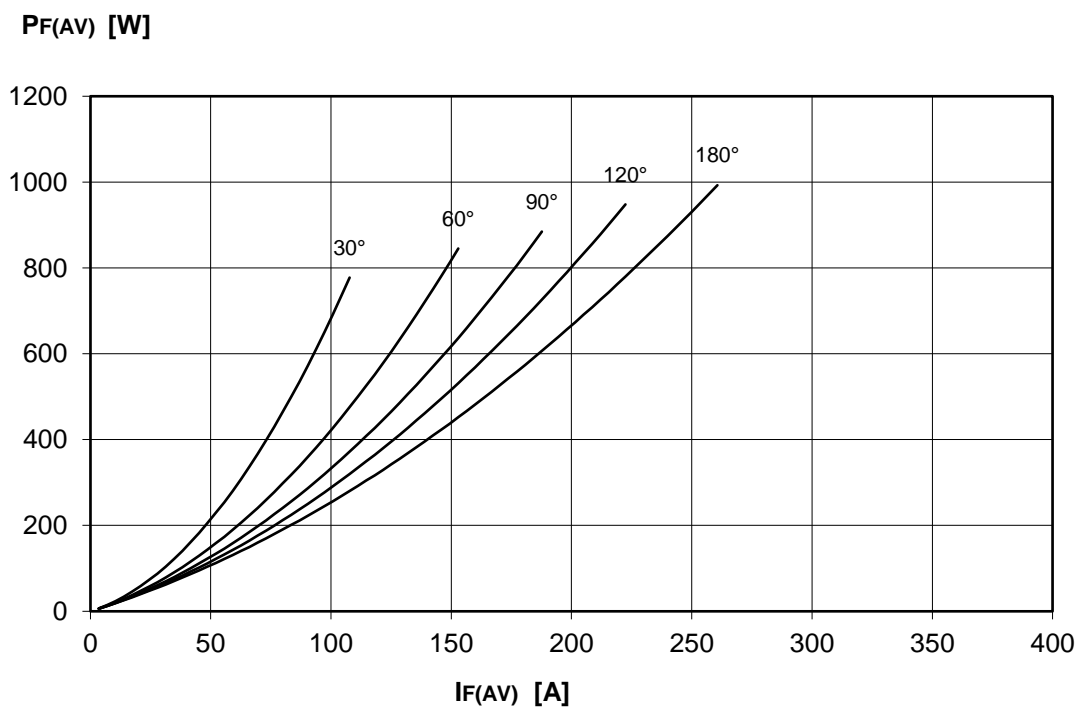


FORWARD RECOVERY VOLTAGE

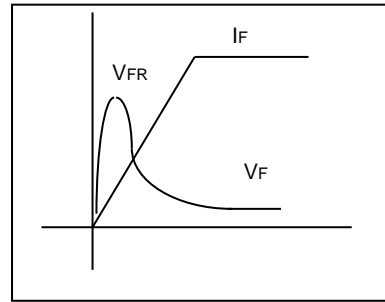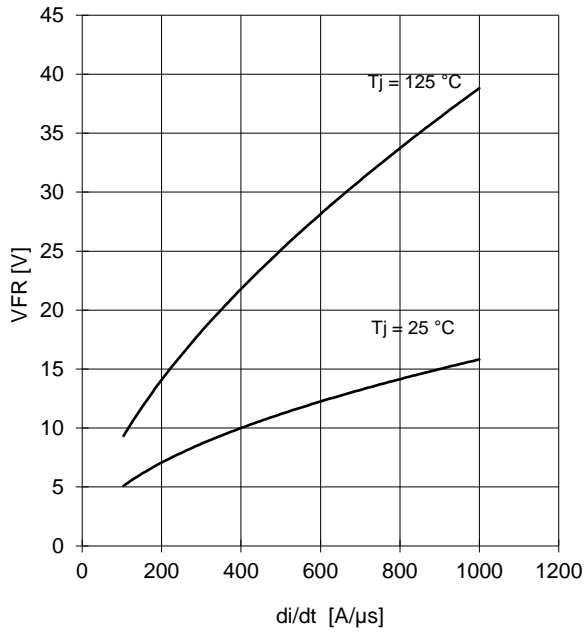

REVERSE RECOVERY CHARGE T_j = 150 °C

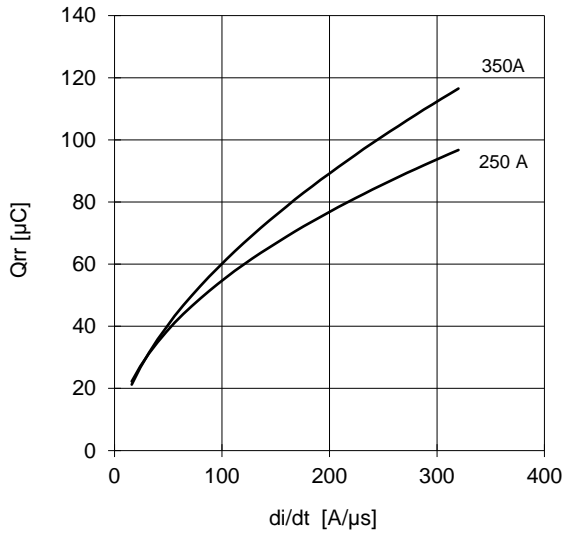


REVERSE RECOVERY CURRENT T_j = 150 °C

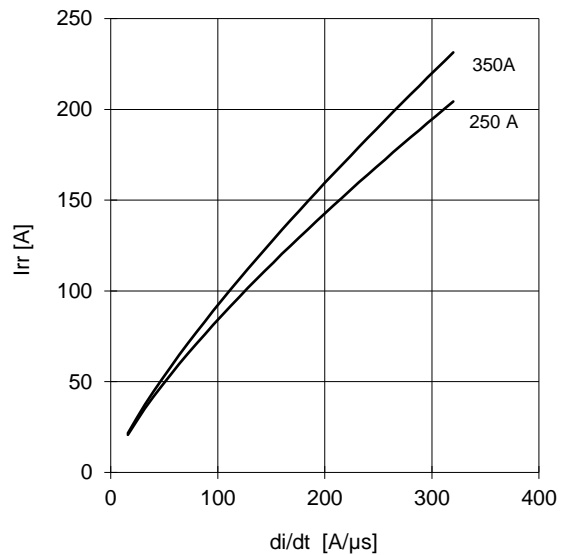

$$t_a = I_{rr} / (di/dt) \quad t_b = t_{rr} - t_a$$

$$\text{Softness (s factor)} \quad s = t_b / t_a$$


$$\text{Energy dissipation during recovery } E_r = V_r \cdot (Q_{rr} - I_{rr} \cdot t_a / 2)$$

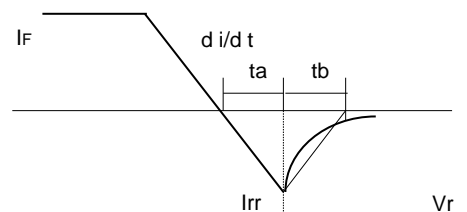


ARF241 RECTIFIER DIODE

FINAL SPECIFICATION July 17 - Issue: 3



FORWARD CHARACTERISTIC
T_j = 150 °C

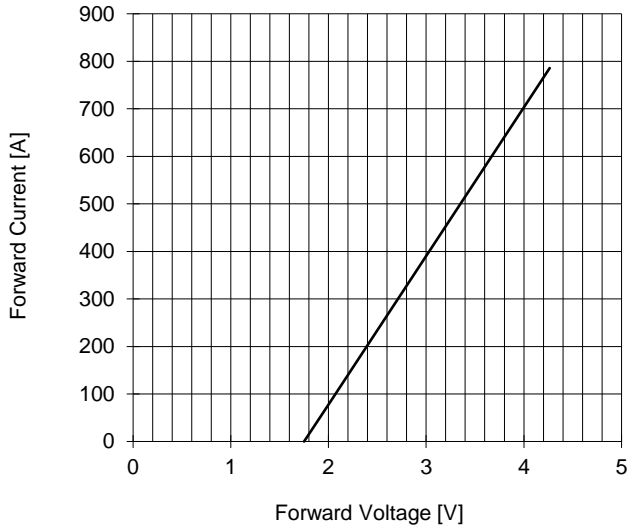

SURGE CHARACTERISTIC
T_j = 150 °C

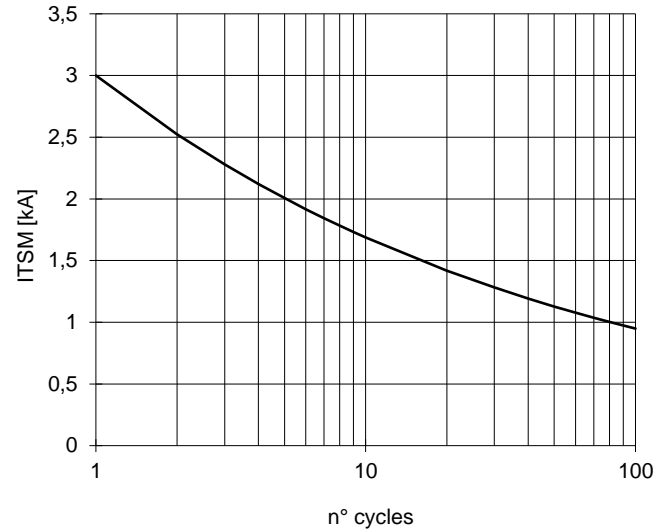


TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

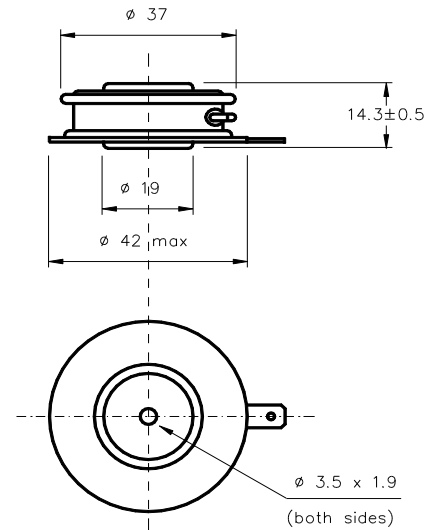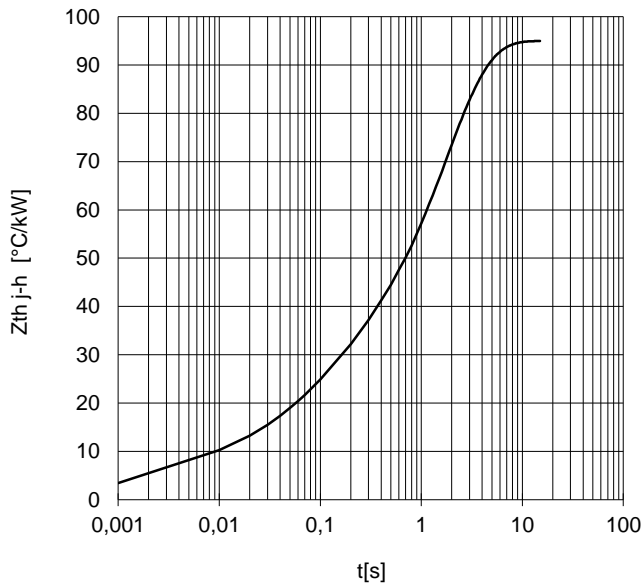

Dimensions
in mm



Distributed by



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm. In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice. If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.