

**FAST RECOVERY DIODE
INSULATED MODULE**

AFF450AHVI

*Full ermetic packaging
*Industrial compatible packaging
*Insulation using Aln substrate
*6KVrms insulation voltage
*Contact screws available on request

Repetitive voltage up to **4500 V**
Mean on-state current **450 A**
Surge current **10 kA**

FINAL SPECIFICATION

apr 17 - ISSUE : 1



| Symbol | Characteristic | Conditions | T _j [°C] | Value | Unit |
|----------------------|---------------------------------------|--|------------------------|-----------|------------------|
| BLOCKING | | | | | |
| V _{RRM} | Repetitive peak reverse voltage | | 150 | 4500 | V |
| V _{RSM} | Non-repetitive peak reverse voltage | | 150 | 4600 | V |
| I _{RRM} | Repetitive peak reverse current | | 150 | 50 | mA |
| CONDUCTING | | | | | |
| I _{F(AV)} | Mean on-state current | 180° sin, 50Hz, T _c =80°C | | 450 | A |
| I _{F(AV)} | Mean on-state current | 180° sin. 50Hz, T _c =55°C | | 560 | A |
| I _{FSM} | Surge on-state current | sine wave, 10 ms | 150 | 10 | kA |
| I ² t | I ² t | without reverse voltage | | 500 x1E3 | A ² s |
| V _F | On-state voltage | On-state curren 1500 A | 150 | 2,525 | V |
| V _{F(TO)} | Threshold voltage | | 150 | 1,40 | V |
| r _F | On-state slope resistance | | 150 | 0,75 | mohm |
| SWITCHING | | | | | |
| t _{rr} | Reverse recovery time | I _F = 1000 A di/dt= 150 A/μs VR = 100 V | 150 | 6,4 | μs |
| Q _{rr} | Reverse recovery charge | | | 1600 | μC |
| I _{rr} | Peak reverse recovery current | | | 500 | A |
| s | Softness (s-factor), min | | | | |
| E _{OFF} | Turn off energy dissipation | | | | J |
| V _{FR} | Peak forward recovery (Typical Value) | di/dt= 400 A/μs | 150 | 90 | V |
| MOUNTING | | | | | |
| R _{th(j-c)} | Thermal impedance | Junction to case, per element | | 70 | °C/kW |
| R _{th(c-h)} | Thermal impedance | Case to heatsink, per element | | 20 | °C/kW |
| T _j | Operating junction temperature | | | -30 / 150 | °C |
| V _{ins} | RMS insulation voltage | 50Hz, circuit to base,all terminal shorted, t=1min | 25 | 6000 | V |
| T | Mounting tourque | Case to heatsink | | 4 to 6 | Nm |
| | | Busbars to terminals | | 12 to 18 | Nm |
| | Mass | | | 1500 | g |

ORDERING INFORMATION : AFF450AHVI S 45


standard specification —┘┘ VRRM/100

SWITCHING CHARACTERISTICS


FORWARD RECOVERY VOLTAGE

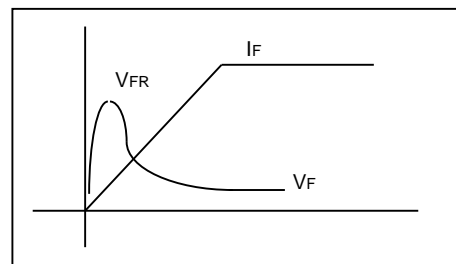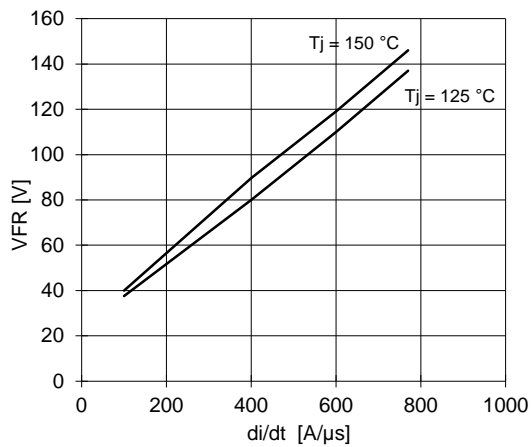

REVERSE RECOVERY CHARGE

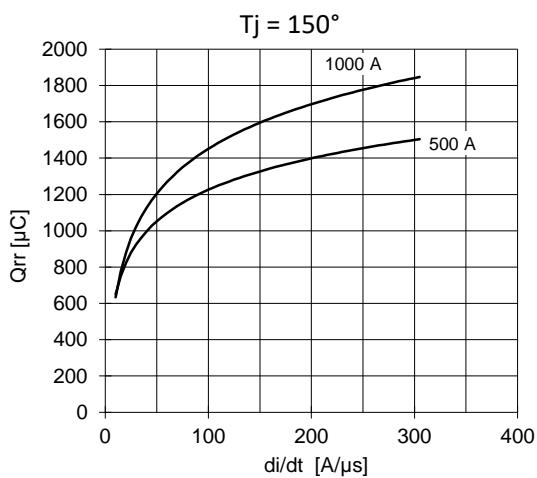


REVERSE RECOVERY CURRENT

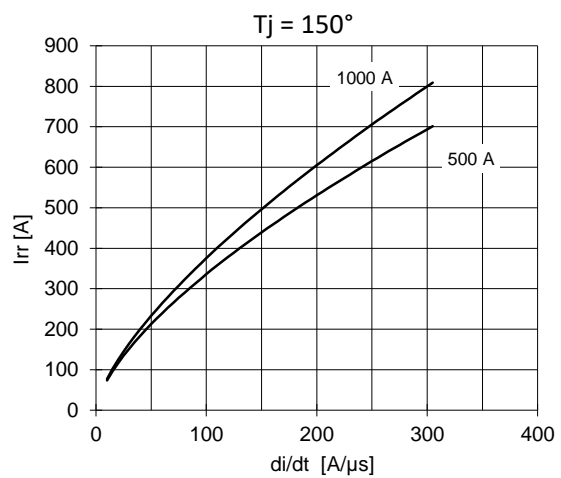

$$t_a = I_{rr} / (di/dt) \quad t_b = t_{rr} - t_a$$

$$\text{Softness (s factor)} \quad s = t_b / t_a$$

$$\text{Energy dissipation during recovery } E_r = V_r \cdot (Q_{rr} - I_{rr} \cdot t_a / 2)$$

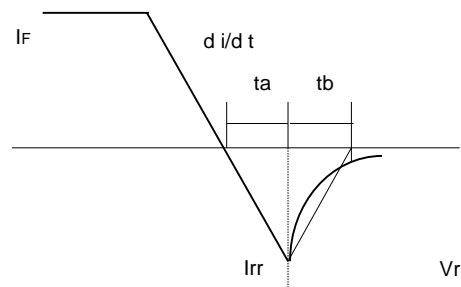


AFF450AHVI




FINAL SPECIFICATION apr 17 - ISSUE : 1



ON-STATE CHARACTERISTIC
T_j = 150 °C

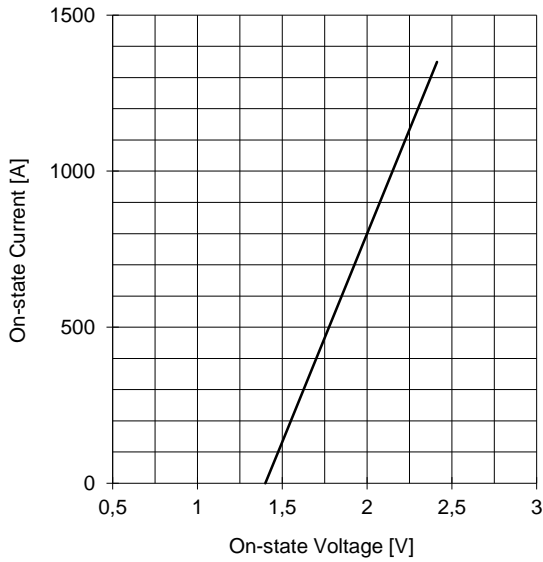

SURGE CHARACTERISTIC
T_j = 150 °C

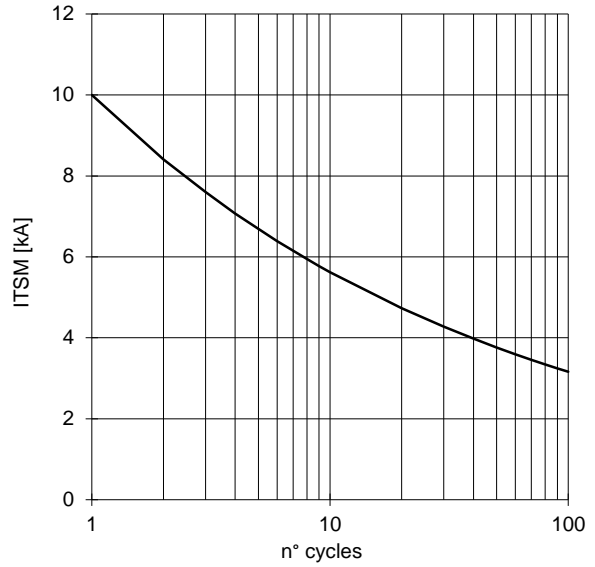

TRANSIENT THERMAL IMPEDANCE

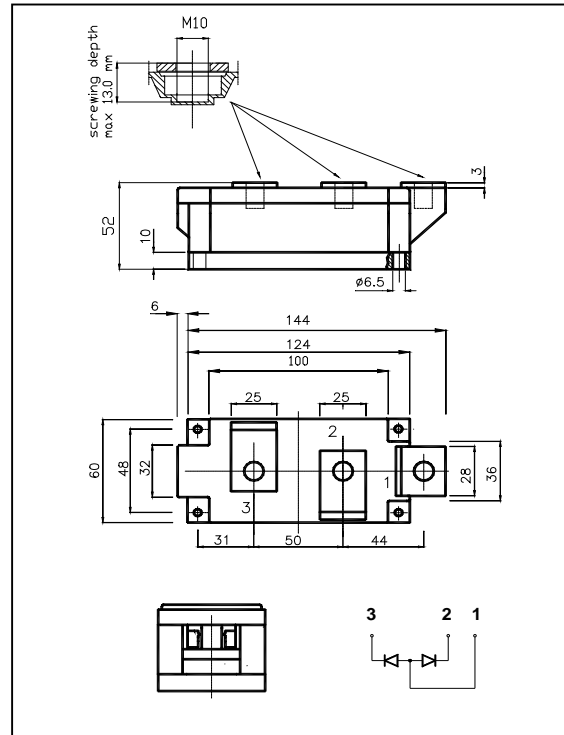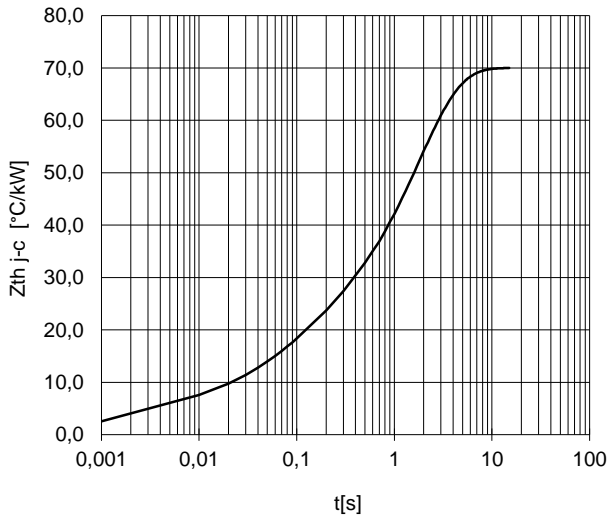

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm. In the interest of product improvement POSEICO SPA reserves the right to change any data given in this data sheet at any time without previous notice. If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

