

**FAST RECOVERY DIODE  
INSULATED MODULE**

- \*Full hermetic packaging
- \*Industrial compatible packaging
- \*Insulation using Aln substrate
- \*6KVrms insulation voltage available on request
- \*Contact screws available on request

**FINAL SPECIFICATION**

apr 17 - ISSUE : 2

**AFF230**

Repetitive voltage up to	<b>2600 V</b>
Mean on-state current	<b>208 A</b>
Surge current	<b>5 kA</b>

Symbol	Characteristic	Conditions	T <sub>j</sub> [°C]	Value	Unit
<b>BLOCKING</b>					
V <sub>RRM</sub>	Repetitive peak reverse voltage		150	2600	V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage		150	2700	V
I <sub>RRM</sub>	Repetitive peak reverse current		150	50	mA
<b>CONDUCTING</b>					
I <sub>F</sub> (AV)	Mean on-state current	180° sin, 50Hz, T <sub>c</sub> =100°C		208,3	A
I <sub>F</sub> (AV)	Mean on-state current	180° sin. 50Hz, T <sub>c</sub> =70°C		288,6	A
I <sub>FSM</sub>	Surge on-state current	sine wave, 10 ms	150	5,0	kA
I <sup>2</sup> t	I <sup>2</sup> t	without reverse voltage		125 x1E3	A <sup>2</sup> s
V <sub>F</sub>	On-state voltage	On-state current = 600 A	150	2,05	V
V <sub>F(TO)</sub>	Threshold voltage		150	1,15	V
r <sub>F</sub>	On-state slope resistance		150	1,500	mohm
Q <sub>rr</sub>	Reverse recovery charge	I <sub>F</sub> = 200 A	150	185	µC
I <sub>rr</sub>	Peak reverse recovery current	di/dt= 100 A/µs	150	140	A
t <sub>rr</sub>	Reverse recovery time	VR = 50 V	150	1,3	µs
<b>MOUNTING</b>					
R <sub>th(j-c)</sub>	Thermal impedance	Junction to case, per element		125	°C/kW
R <sub>th(c-h)</sub>	Thermal impedance	Case to heatsink, per element		20	°C/kW
T <sub>j</sub>	Operating junction temperature			-30 / 150	°C
V <sub>ins</sub>	RMS insulation voltage	50Hz, circuit to base, all terminal shorted	25	4500	V
T	Mounting tourque	Case to heatsink		4 to 6	Nm
		Busbars to terminals		12 to 18	Nm
Mass				1500	g



 ORDERING INFORMATION : AFF230 S 26  
 standard specification ——— VRRM/100

(\* 6000V available on request.  
 Add HVI to the desired code in  
 phase of order, i.e. AFF230HVIS26


FINAL SPECIFICATION apr 17 - ISSUE : 2

### SWITCHING CHARACTERISTICS


#### FORWARD RECOVERY VOLTAGE

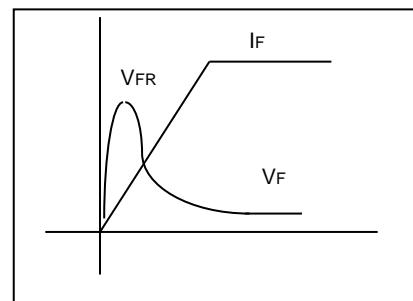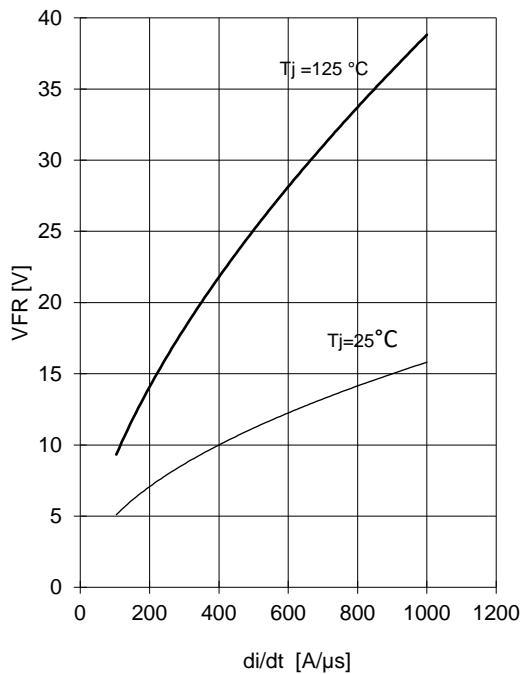

REVERSE RECOVERY CHARGE  
 $T_j = 150^\circ C$

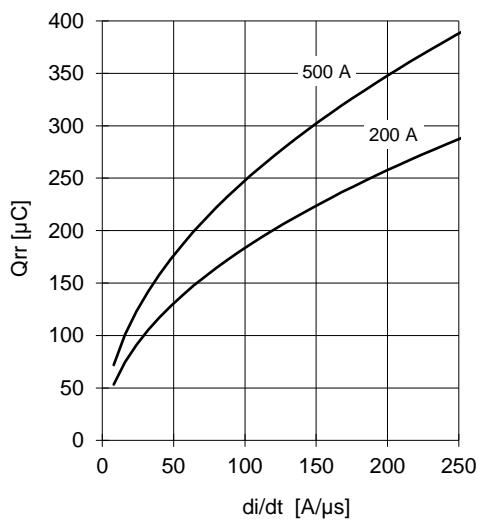


REVERSE RECOVERY CURRENT  
 $T_j = 150^\circ C$

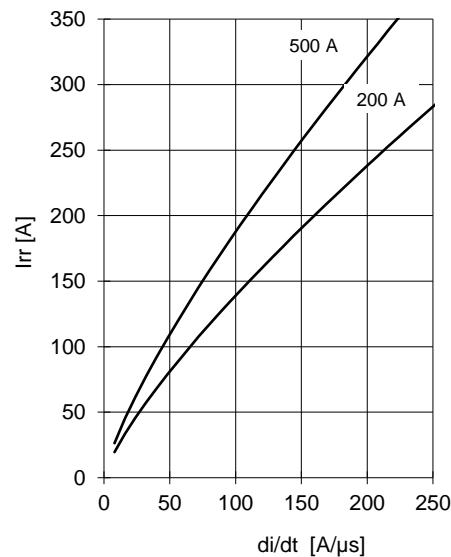

$$ta = Irr / (di/dt) \quad tb = trr - ta$$

$$\text{Softness (s factor)} \quad s = tb / ta$$

$$\text{Energy dissipation during recovery } Er = V_r \cdot (Q_{rr} - Irr \cdot ta / 2)$$

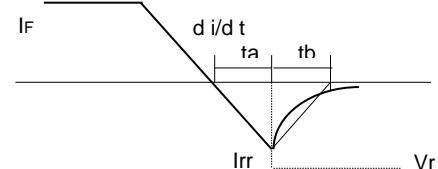


# AFF230 FAST RECOVERY DIODE




FINAL SPECIFICATION apr 17 - ISSUE : 2



ON-STATE CHARACTERISTIC  
 $T_J = 150 \text{ }^\circ\text{C}$

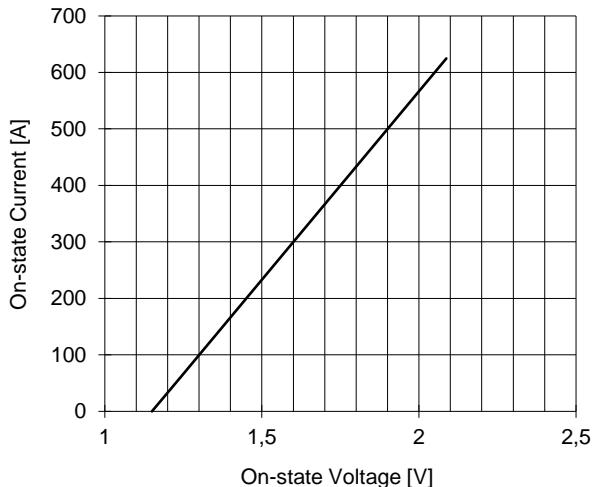

SURGE CHARACTERISTIC  
 $T_J = 150 \text{ }^\circ\text{C}$

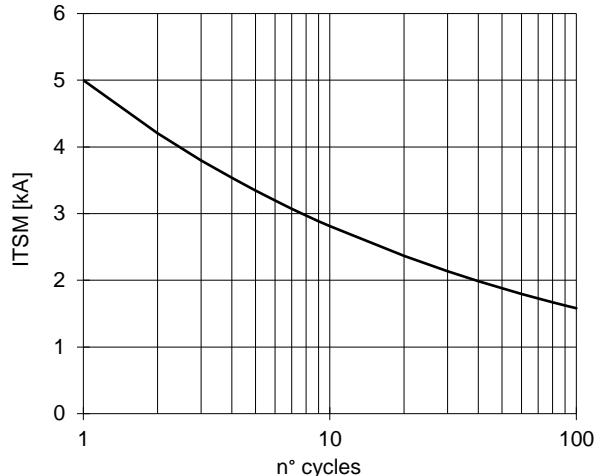

TRANSIENT THERMAL IMPEDANCE

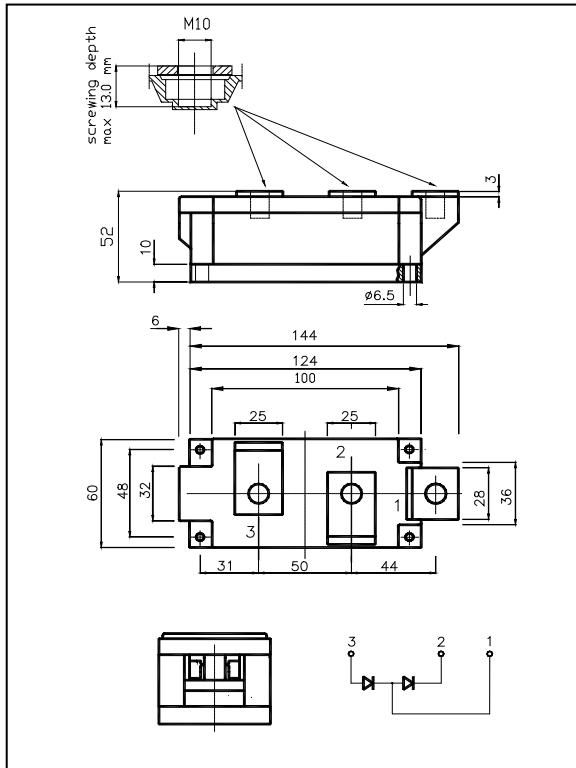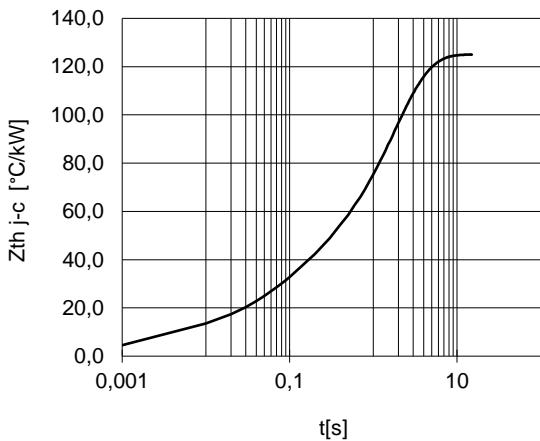

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2  $\mu\text{m}$ .  
In the interest of product improvement POSEICO SPA reserves the right to change any data given in this data sheet at any time without previous notice.  
If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by